

GHH RAND®

CD14D – Oil free screw compressor block

The CD14D is a double stage, gear driven and oil-free screw compressor block, which can be used for general industrial applications.


Operating Range

| Parameters | Units | Min | Max |
|--------------------------|-------------------------|------------|-------------|
| Power | kW / hp | 58.5 / 78 | 227 / 304 |
| Discharge Pressure, abs. | bar / psi | 4.5* / 65* | 11.5 / 167 |
| Volume Flow | m ³ /h / cfm | 751 / 442 | 1805 / 1062 |

*Proposed minimum pressure, Medium: Air, Inlet temperature 20°C/68°F, RH: 60%, Inlet pressure 1 bar(a)/14.5 psi(a)

Technical Data

| Parameters | Units | Data |
|------------|----------|------------|
| Length | mm / in | 760 / 29.9 |
| Width | mm / in | 730 / 28.7 |
| Height | mm / in | 770 / 30.3 |
| Weight | kg / lbs | 530 / 1168 |

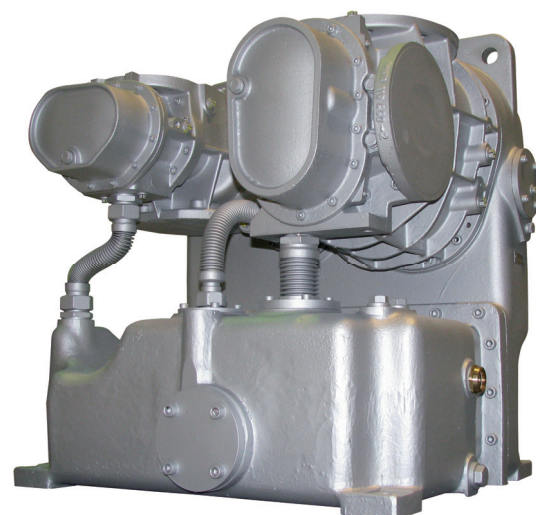

GHH RAND recommends:



- Maximize life and efficiency with Ultralube or Ultralube F (food grade)
- Ask your sales rep. for details

Ingersoll-Rand Trading GmbH
Max-Planck-Ring 27 • 46049 Oberhausen • Germany
Phone +49 (0) 208 9994-0 • Fax +49 (0) 208 9994-111
industrial-sales@ghhrand.com • www.ghhrand.com